


NOTES:
 FINISH - GRAY BAKED ENAMEL POWDER COAT
 PAINT OVER CLEANED GALVANNEALED STEEL.
 MAXIMUM SYSTEM VOLTAGE: 120/240 VAC 1 Ø 3W.
 UL LISTED - FILE E-6294
 SUITABLE ONLY FOR USE AS SERVICE EQUIPMENT.
 SUITABLE FOR UNDERGROUND/OVERHEAD SERVICE.
 MEETS EUSERC SPECIFICATIONS.
 CONVERTIBLE TO SEMIFLUSH WITH SC200F FLANGE KIT

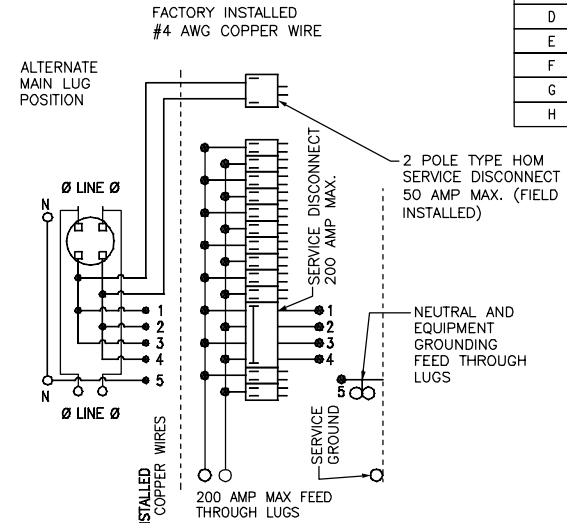

FACTORY INSTALLED NO. 2 AWG COPPER WIRES

200 AMP MAX FEED THROUGH LUGS

2 POLE TYPE HOM SERVICE DISCONNECT 50 AMP MAX. (FIELD INSTALLED)

NEUTRAL AND EQUIPMENT GROUNDING FEED THROUGH LUGS

SERVICE GROUND

FACTORY INSTALLED #4 AWG COPPER WIRE

ALTERNATE MAIN LUG POSITION

Ø LINE Ø

Ø LINE Ø

1 2 3 4 5

1 2 3 4 5

200 AMP MAX FEED THROUGH LUGS

SERVICE DISCONNECT 200 AMP MAX.

NEUTRAL AND EQUIPMENT GROUNDING FEED THROUGH LUGS

SERVICE GROUND

SC816D150C
 SC816D200C

DUAL DIMENSIONS: INCHES
 MILLIMETERS

AMPERE RATING	FACTORY INSTALLED BYPASS TYPE	SHORT CIRCUIT CURRENT RATING	CATALOG NUMBER	SERIES	SPACES	MAXIMUM NUMBER OF SINGLE POLE HOM CIRCUITS	LINE SIDE PHASE & NEUTRAL LUGS (AWG/KCMIL)	SERVICE GROUND LUG (AWG/KCMIL)	FEED THROUGH PHASE & NEUTRAL LUGS (AWG/KCMIL)
150	NONE	10K	SC816D150C	002	8	16	#6-300	#14-1/0	#6-250
200	NONE	10K	SC816D200C	002	8	16	#6-300	#14-1/0	#6-250

COMBINATION SERVICE ENTRANCE DEVICES
 RING TYPE ALL-IN-ONE
 RAINPROOF NEMA TYPE 3R ENCLOSURE
 SURFACE/SEMI FLUSH



DWG# 1993
 NO.